

Product data sheet

Specifications

SQUARE D



Mini circuit breaker, E-Frame, 50A,
3 pole, 480Y/277VAC, 65kA max,
bolt on [TAA]

EGB34050

Product availability: Stock - Normally stocked in distribution facility

Main

Range	125 A Frame EDB-EGB-EJB
Product Type	Miniature circuit-breaker
Device Short Name	EGB
Module Type	E-Frame
Trip Unit Rating	1800 A

Complementary

Rated Current	50 A
Maximum Operating Voltage	480Y/277 V AC
AWG Gauge	AWG 12...AWG 2/0 aluminium AWG 14...AWG 2/0 copper
Breaking Capacity	35 kA 277 V AC 65 kA 240 V AC 35 kA 480Y/277 V AC 65 kA 120 V AC 65 kA 120/240 V AC
Circuit Breaker Application	HID rated HACR rated
Electrical Connection	Lugs aluminium
Holding Current	630 A
Local Signalling	Trip indicator
Mounting Mode	Bolt-on
Number of Poles	3
Number of Spaces	3
Number of Spaces Required	3
Product Destination	NF panelboard
Protect Type	Short-circuit Overload
Trip Unit Technology	Thermal-magnetic
Breaking Capacity Code	G
Tightening Torque	34.5 lbf.in (3.9 N.m) 0.004...0.009 in ² (2.5...6 mm ²) (AWG 14...AWG 10) 49.6 lbf.in (5.6 N.m) 0.02...0.1 in ² (10...70 mm ²) (AWG 8...AWG 2/0)
Height	5.66 in (143.76 mm)
Width	2.94 in (74.68 mm)
Depth	4.05 in (102.87 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Product Weight	4 lb(US) (1.8 kg)
----------------	-------------------

Environment

Product Certifications	cULus
------------------------	-------

Ambient Air Temperature for Operation	104 °F (40 °C)
---------------------------------------	----------------

Ordering and shipping details

Category	US10DE200936
----------	--------------

Discount Schedule	0DE2
-------------------	------

GTIN	785901073024
------	--------------

Returnability	Yes
---------------	-----

Country of origin	MX
-------------------	----

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Nbr. of units in pkg.	1
-----------------------	---

Package 1 Height	4.800 in (12.192 cm)
------------------	----------------------

Package 1 Width	6.200 in (15.748 cm)
-----------------	----------------------

Package 1 Length	9.900 in (25.146 cm)
------------------	----------------------

Package weight(Lbs)	3.510 lb(US) (1.592 kg)
---------------------	-------------------------

Compliance

Compliance	TAA Compliant
------------	---------------

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	16 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	11 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.5 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.6 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	2 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	8781af64-acd9-485c-9a86-abcdfbd458e3
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	30
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

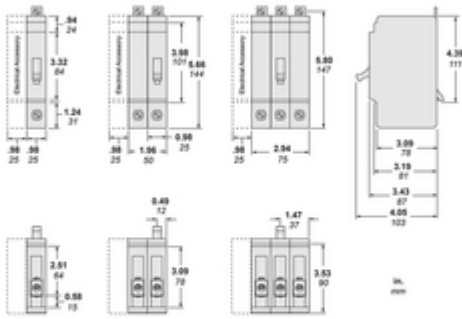

All dimensions are approximate.
Also see technical drawings and/or documentation.