




Note:  
- Drawings Not To Scale  
- Drawings Subject to Change Without Notice  
- Dimensions are inches next to [Millimeters]

Part No.:

LC1D09X7

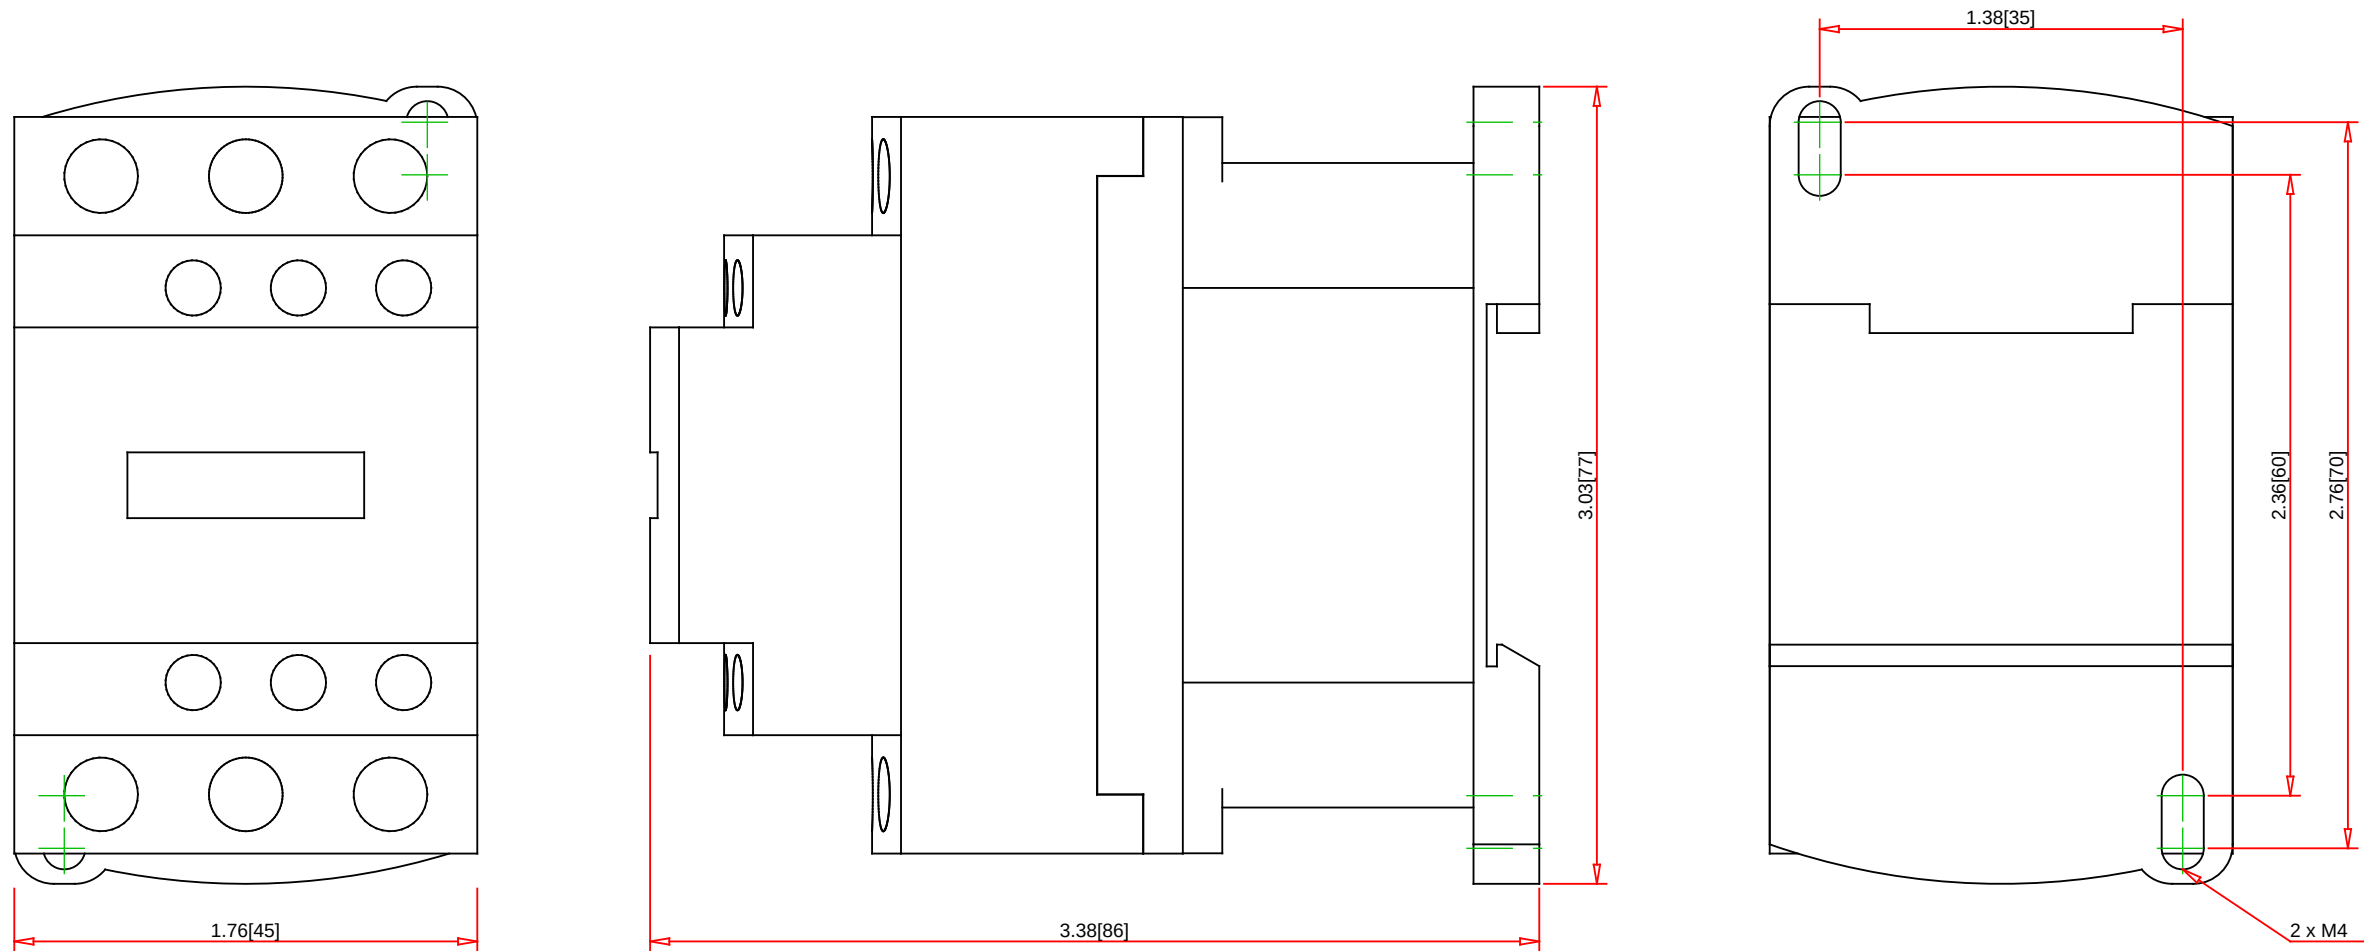

Schneider Electric United States  
North American Division  
Boston One Campus  
800 Federal Street  
Andover, MA 01810, USA  
Phone: +1 8773425173  
Email: CCC@us.schneider-electric.com

Technical Information:

Rating: 600V / 9A  
UL File/CCN: E164862 / NLDX  
CSA File: LR43364 3211 04  
Meets Standards: IEC 60647-4  
Weight: 0.71 lb (0.32 kg)  
Termination Method: Screw Clamp  
Wire Size: Power: #10 - #18 AWG  
Control: #10 - #18 AWG  
Terminal torque: Power: 15 lb-in (1.7 Nm)  
Control: 15 lb-in (1.7 Nm)  
Mounting Hwd.: 35mm DIN Rail, #8 screw

Specification:

Description: TeSys D IEC Contactor - 9A - Vac Coil  
Type: TeSys D IEC Contactor - 9A - 600Vac Coil  
Voltages Code: X7 at 600Vac 50/60 Hz

Coil Consumption: Inrush 70 VA  
Sealed 7.5 VA

| Single Phase |      |      | Three Phase |      |        |
|--------------|------|------|-------------|------|--------|
| 115V         | 230V | 200V | 230V        | 460V | 575V   |
| 0.5 HP       | 1 HP | 2 HP | 2 HP        | 5 HP | 7.5 HP |